


RM-470TL

REMOTE DISPLAY

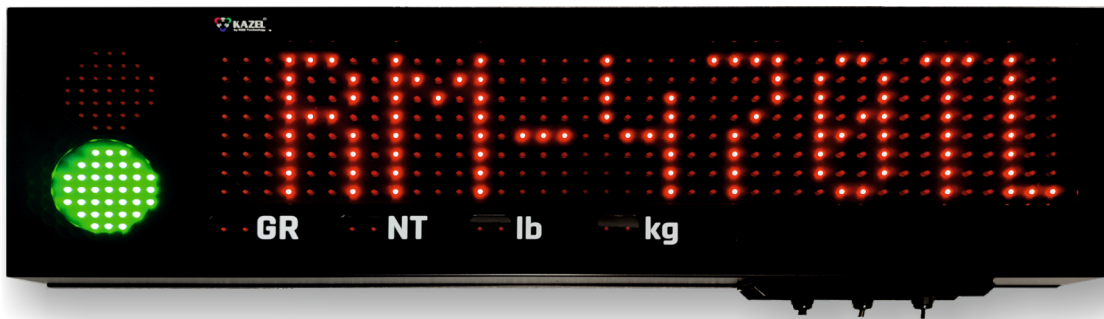

Technical details and functions

- ✧ Super bright red and green LEDs with a wide reading angle
- ✧ Standard full 40x8 pixels matrix displays all printable ASCII characters
- ✧ Digit height: 4.7 in, Five digit fonts
- ✧ 2.8 in traffic lights with an option to display arrows
- ✧ Annunciator lights
- ✧ Automatic brightness adjustment
- ✧ Durable powder-coated mild steel housing
- ✧ Wall mounting plates as standard
- ✧ Optional weather hood / visor or pole mounting kit
- ✧ Weather-tight finish (protection class IP65)
- ✧ Drop-down electronics carriage for quick and easy installation and service
- ✧ Standard communication via RS-232, RS-485/422 or Ethernet interface
- ✧ Optional dry-contact control of traffic lights
- ✧ Communication status lights
- ✧ Data transfer rate: 300 - 230400 bps
- ✧ Automatic detection of communication protocol
- ✧ Compatibility with all weighing indicators
- ✧ Operating temperature range -13°F ÷ +158°F
- ✧ Power supply: 110-240VAC 47-63Hz
- ✧ Average power consumption: 8W
- ✧ Dimensions: (W x H x D) 31.1 x 8.7 x 2.9 in
- ✧ Weight: 12 lb / 5.5 kg
- ✧ Warranty: 3 years

